




Size: 173mmx169mmx140mm
Airflow: 97~109m³/hr
57~64CFM
Weight: 948g
Noise: 64~66dBA
Impeller: PBT UL94V-0 Reinforced Plastic
Frame: PP UL94V-0 Reinforced Plastic
Motor: Shaded Pole Induction Motor
Lead Wire: SPT-2 or Customize Design (Optional)
Insulation: Class B, T. P. F.
Safety: UL.CUL.CE
Operation Temperature: -30℃~+70℃

Unit:mm

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M³/hr	CFM		
RCH1726S1-C	Sleeve	230	50/60	0.26/0.27	54/56	2600/2900	64/65	97/109	57/64	23.6/34	948
RCH1726S2-C		120	60	0.55	62	3150	66	109	64	32	

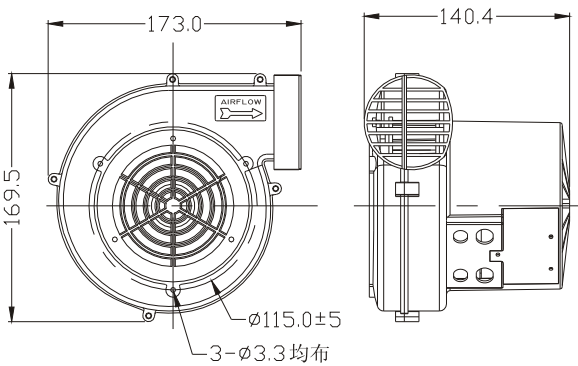