



# FMR6080 FP-602

主な用途 / マッサージャー  
アクチュエーター

Main Application / Massager  
Actuator

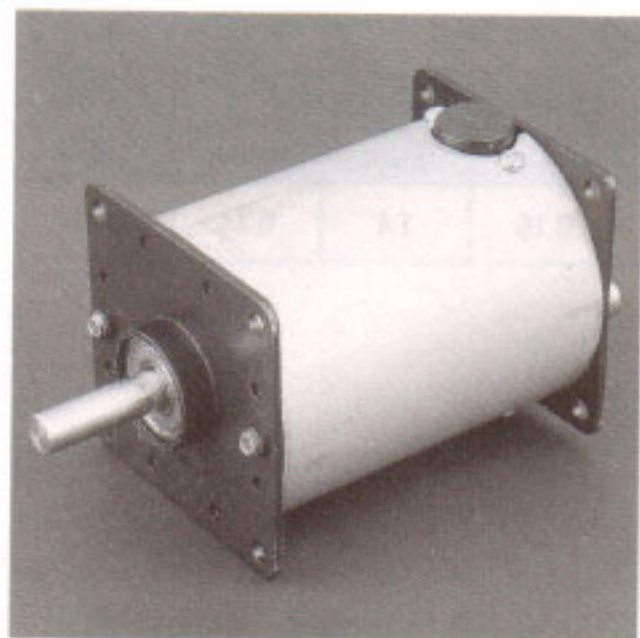

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY		STALL				
	OPERATING RANG	RATED	SPEED r/min	CURRENT A	TORQUE g-cm	TORQUE mN-m	SPEED r/min	CURRENT A	TORQUE g-cm	TORQUE mN-m	CURRENT A
FMR6080 14	10~30	24(AC)	3800	0.37	(1500)	(147)	(2300)	(3.0)			
FMR6080 16	80~120	100(AC)	4100	0.13	(2000)	(196)	(2350)	(0.98)			
FMR6080 11	80~120	100(AC)	3650	0.1	(1000)	(98)	(2600)	(0.48)			

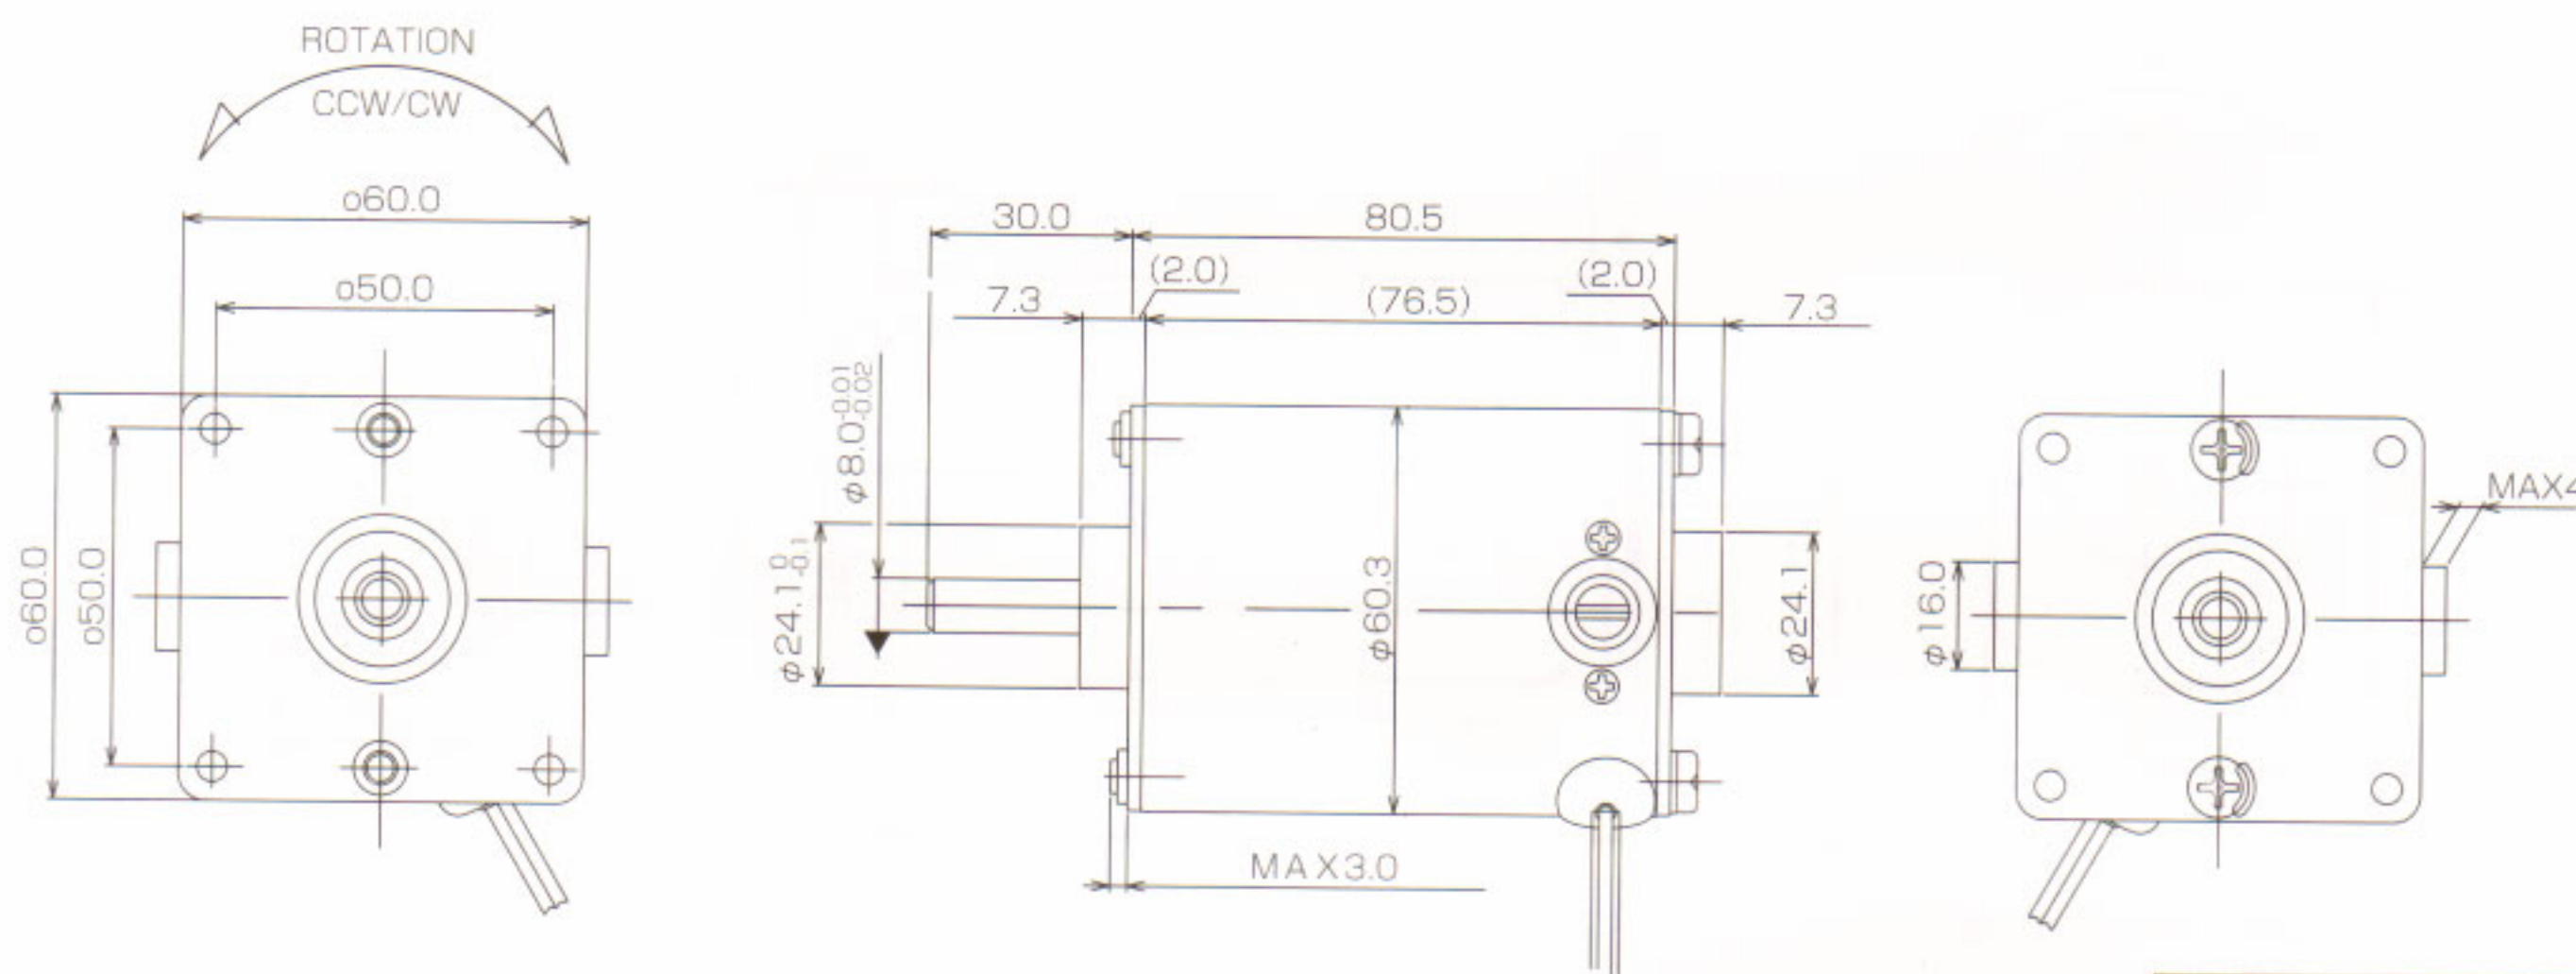

WEIGHT : 780g

## FMR6080 11

24VAC

## FMR6080 16

100VAC

