




Size: 219mmx192mmx128mm
 Airflow: 85~92m³/hr
 50~54CFM
 Weight: 998g
 Noise: 62~63dBA
 Impeller: PBT UL94V-0 Reinforced Plastic
 Frame: PP UL94V-0 Reinforced Plastic
 Motor: Shaded Pole Induction Motor
 Lead Wire: SPT-2 or Customize Design (Optional)
 Insulation: Class B, T. P. F.
 Safety: UL.CUL.CE
 Operation Temperature: -30°C~+70°C

Unit:mm

Model	Bearing System	Voltage VAC	Freq. Hz	Current A	Power W	Speed RPM	Noise dBA	Air Flow		Static Pressure (mmH ₂ O)	Weight Gram
								M ³ /hr	CFM		
RCH2110S1-C	Sleeve	230	50/60	0.26/0.29	49/59	2500/2700	62/63	85/92	50/54	24/33	998
RCH2110S2-C		120	60	0.58	58	2700	63	92	54	33	

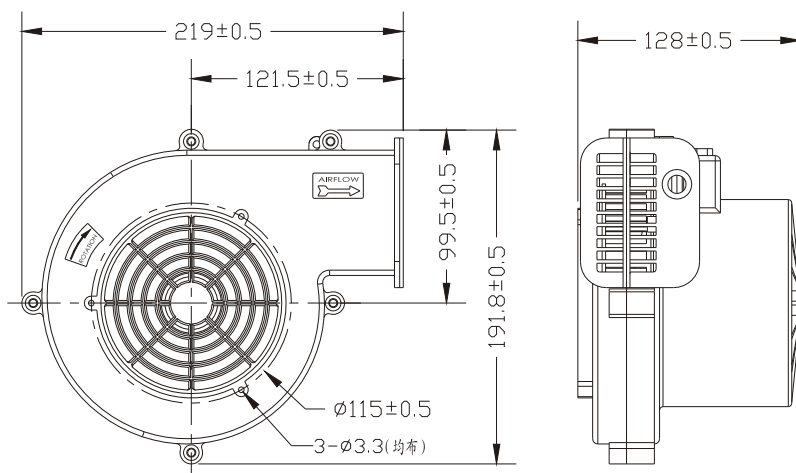