



FMF1015 CN-12

主な用途 / カメラ
ラジコン

Main Application / Camera
Radio control

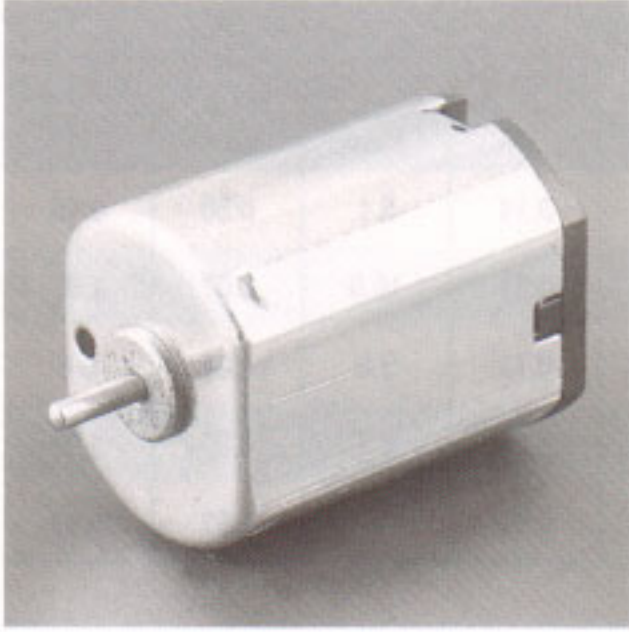

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATING RANG	RATED	SPEED r/min	CURRENT A	TORQUE g-cm mN-m		SPEED r/min	CURRENT A	TORQUE g-cm mN-m		
FMF1015 209	1~3	2.4	16500	0.08	2.4	0.23	13000	0.3	11.3	1.11	1.09
FMF1015 213	2~8	4.5	14100	0.05	3.6	0.35	11100	0.18	16.9	1.66	0.67
FMF1015 218	2~8	5	12100	0.05	1.7	0.17	8500	0.12	5.8	0.57	0.3

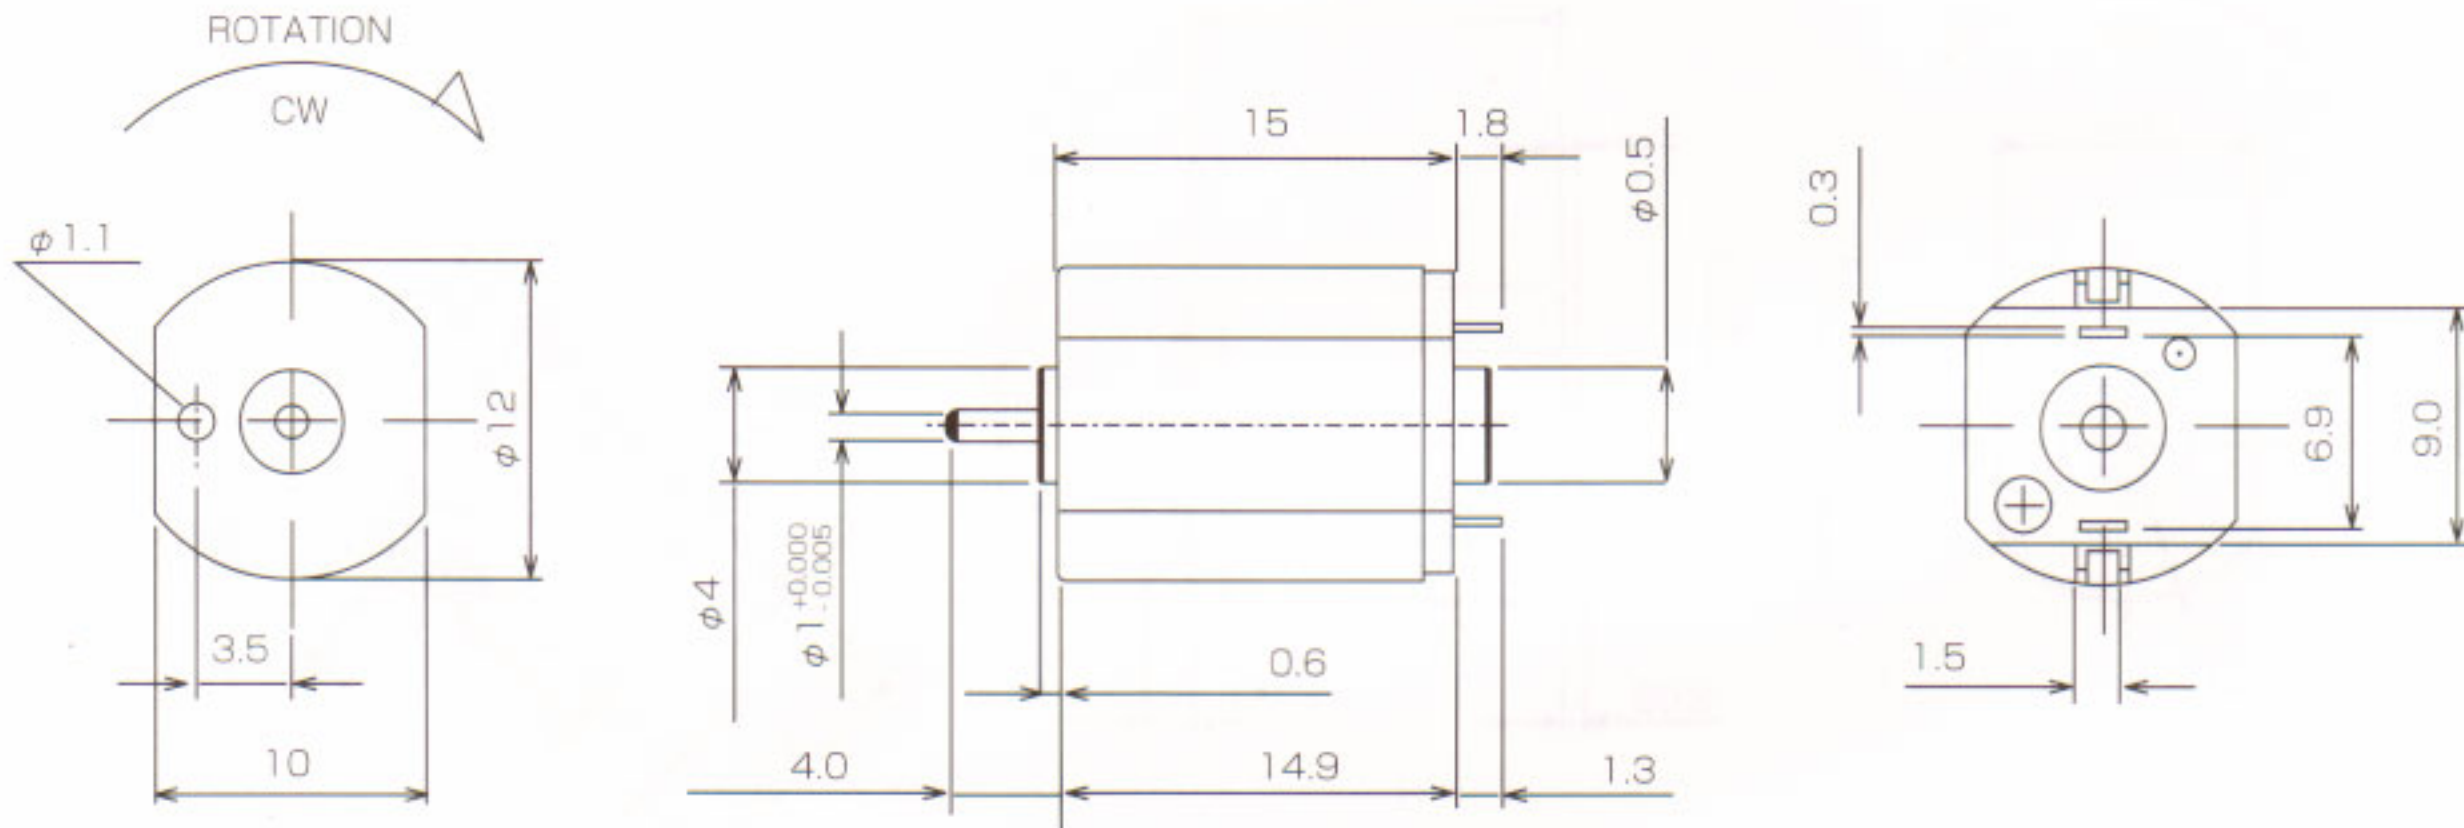

WEIGHT : 6g

FMF1015 209

2.4V

FMF1015 213

4.5V

