



# FMF1536 FM-87

主な用途/シェーバー  
バリカン

Main Application/Shaver  
Hair clipper

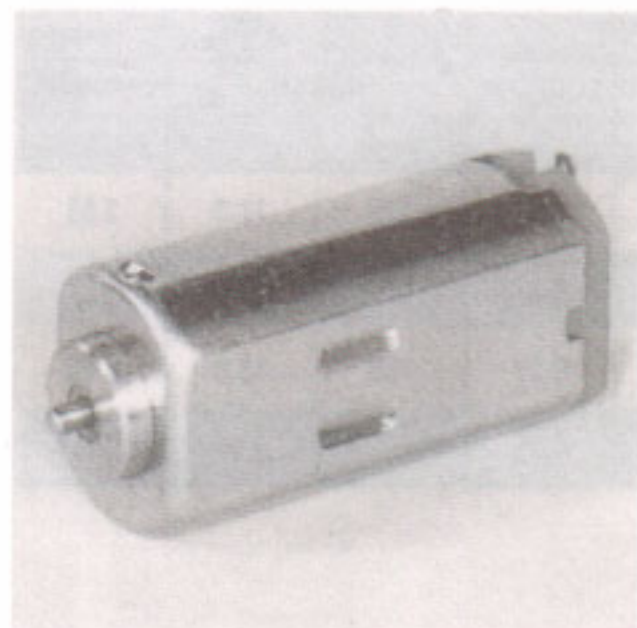

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATING RANG	RATED	SPEED	CURRENT	TORQUE		SPEED	CURRENT	TORQUE		
			r/min	A	g-cm	mN-m	r/min	A	g-cm	mN-m	A
FMF1536 G1	1~1.5	1.2	8250	0.36	19	1.86	6800	1.78	108	10.6	8.44
FMF1536 U1	1~1.5	1.2	9950	0.49	21	2.06	8200	2.31	119	11.7	10.84
FMF1536 S	1~3	2.4	9000	0.2	19	1.86	7500	0.98	114	11.2	4.88

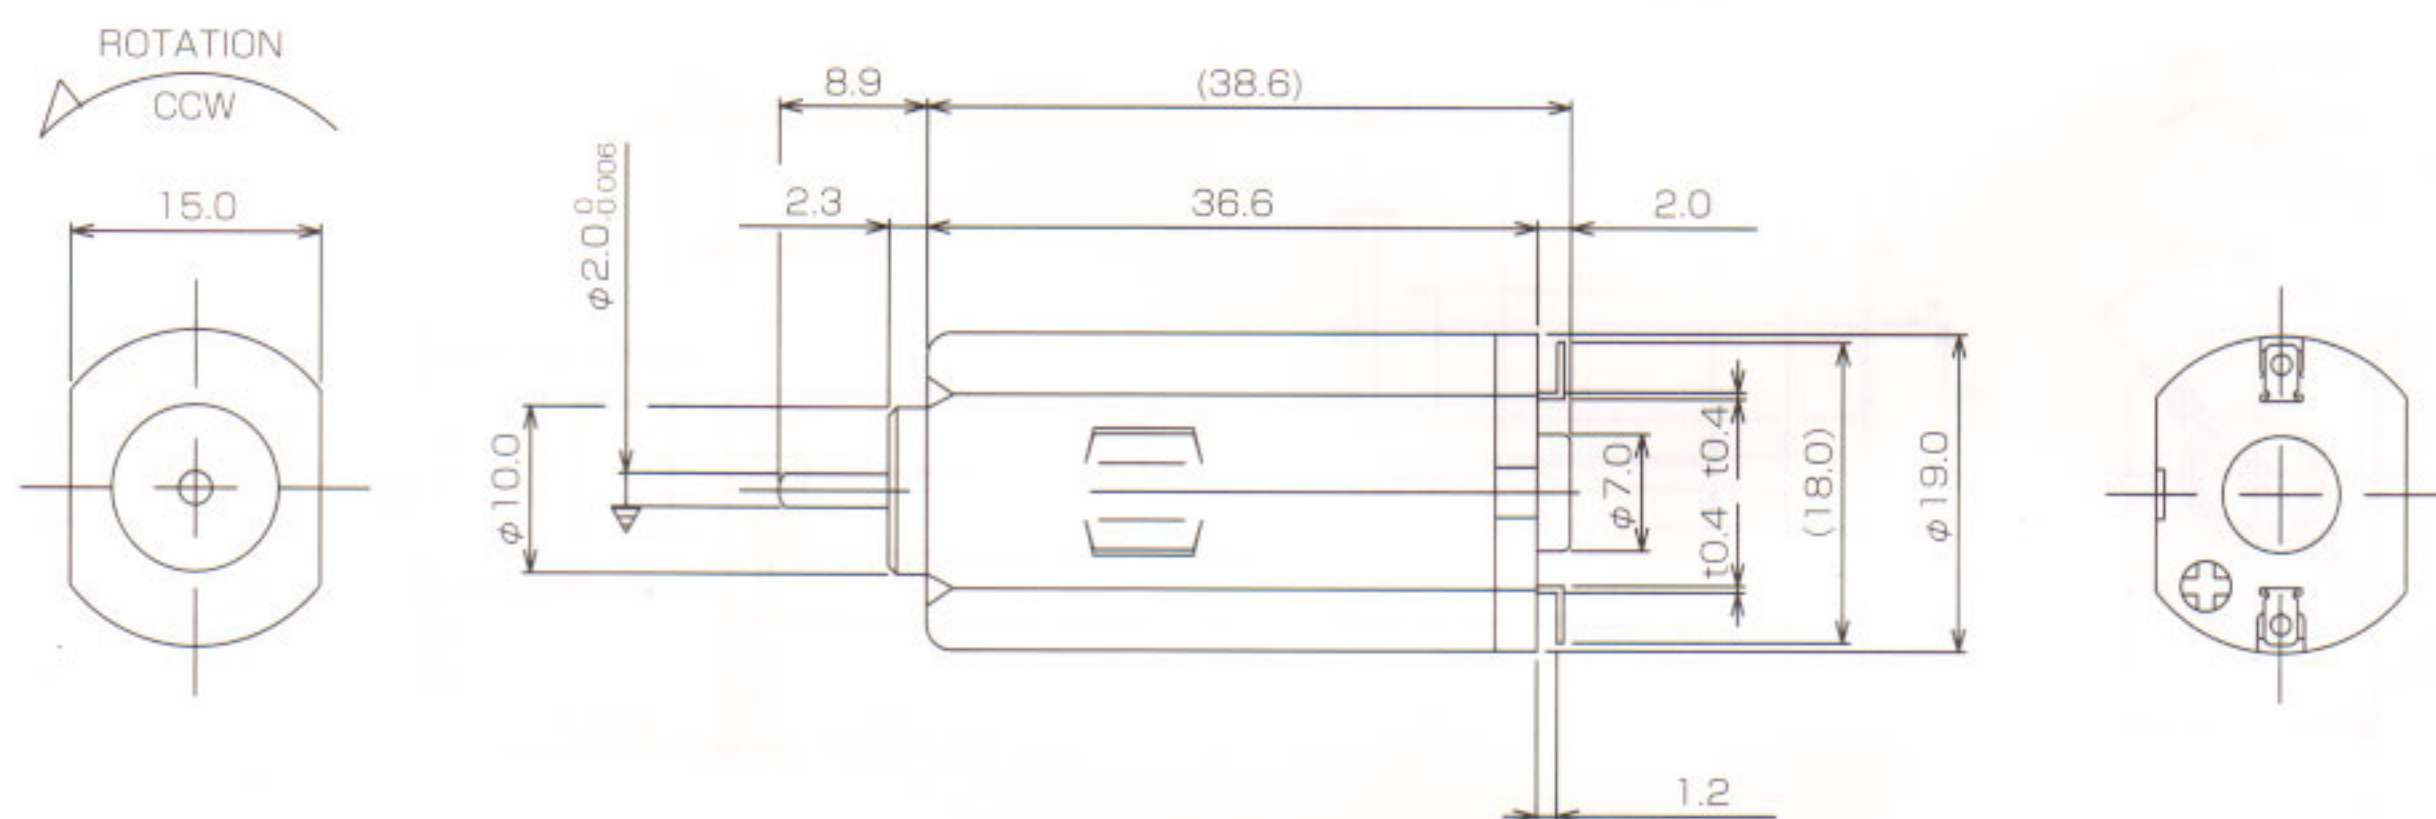

WEIGHT : 38g

## FMF1536 S

2.4V

## FMF1536 U1

1.2V

