


FMF2951


FM-108

主な用途 / 掃除機
パワーブラシ

Main Application / Vacuum cleaner
Power brush

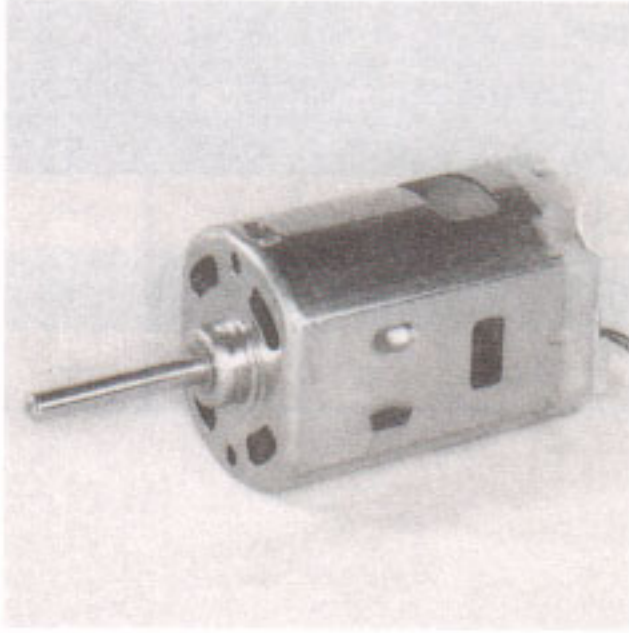

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATING RANG	RATED	SPEED	CURRENT	TORQUE		SPEED	CURRENT	TORQUE		
			r/min	A	g-cm	mN-m	r/min	A	g-cm	mN-m	A
FMF2951 S	10~30	24	6300	0.12	160	15.7	4200	0.58	480	47.0	1.42
FMF2951 A	80~120	100(AC)	15000	0.14	(90)	(8.8)	(118000)	(0.3)	—	—	—
FMF2951 Z	100~240	200(AC)	16000	0.10	(90)	(8.8)	(13000)	(0.18)	—	—	—

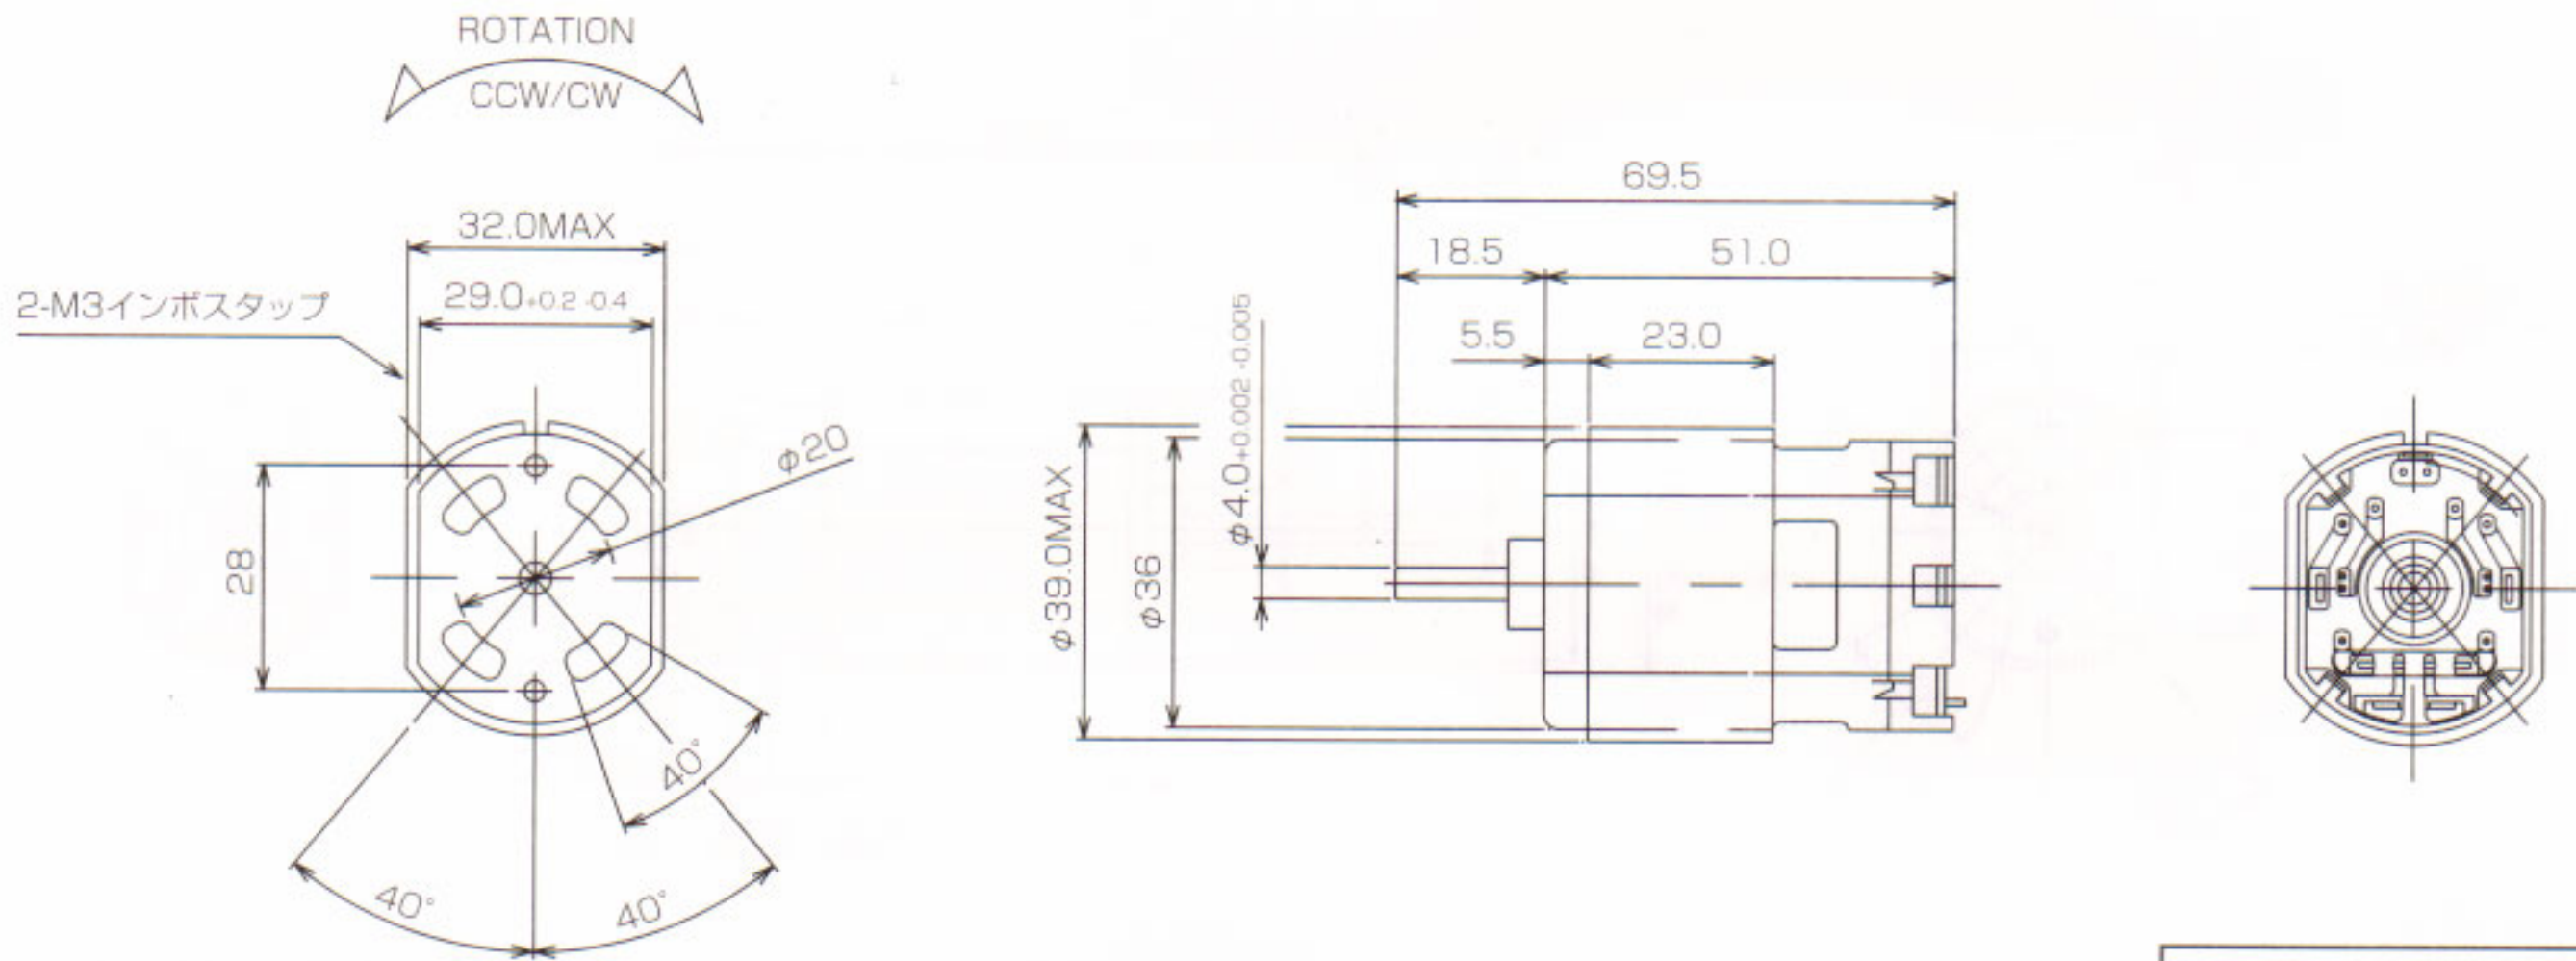

WEIGHT : 125g

FMF2951 A

100VAC

FMF2951 S

24V

