


FMR4545 FM-94

主な用途 / プリンター
 マッサージャー
 コインホッパー

Main Application / Printing machine
 Massager
 Coin hopper



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATING RANG	RATED	SPEED r/min	CURRENT A	TORQUE g-cm mN-m		SPEED r/min	CURRENT A	TORQUE g-cm mN-m		
FMR4545 HL2	6~15	12	6100	0.23	165	16.2	5100	1.14	992	97.2	5.65
FMR4545 LE	10~30	24	3200	0.06	147	14.4	2600	0.27	800	78.4	1.18
FMR4545 HL1	10~30	24	5500	0.11	190	18.6	4650	0.57	1129	110.7	2.85
FMR4545 LD	80~120	100AC	4300	0.03	(300)	(29.4)	(1800)	(0.15)			

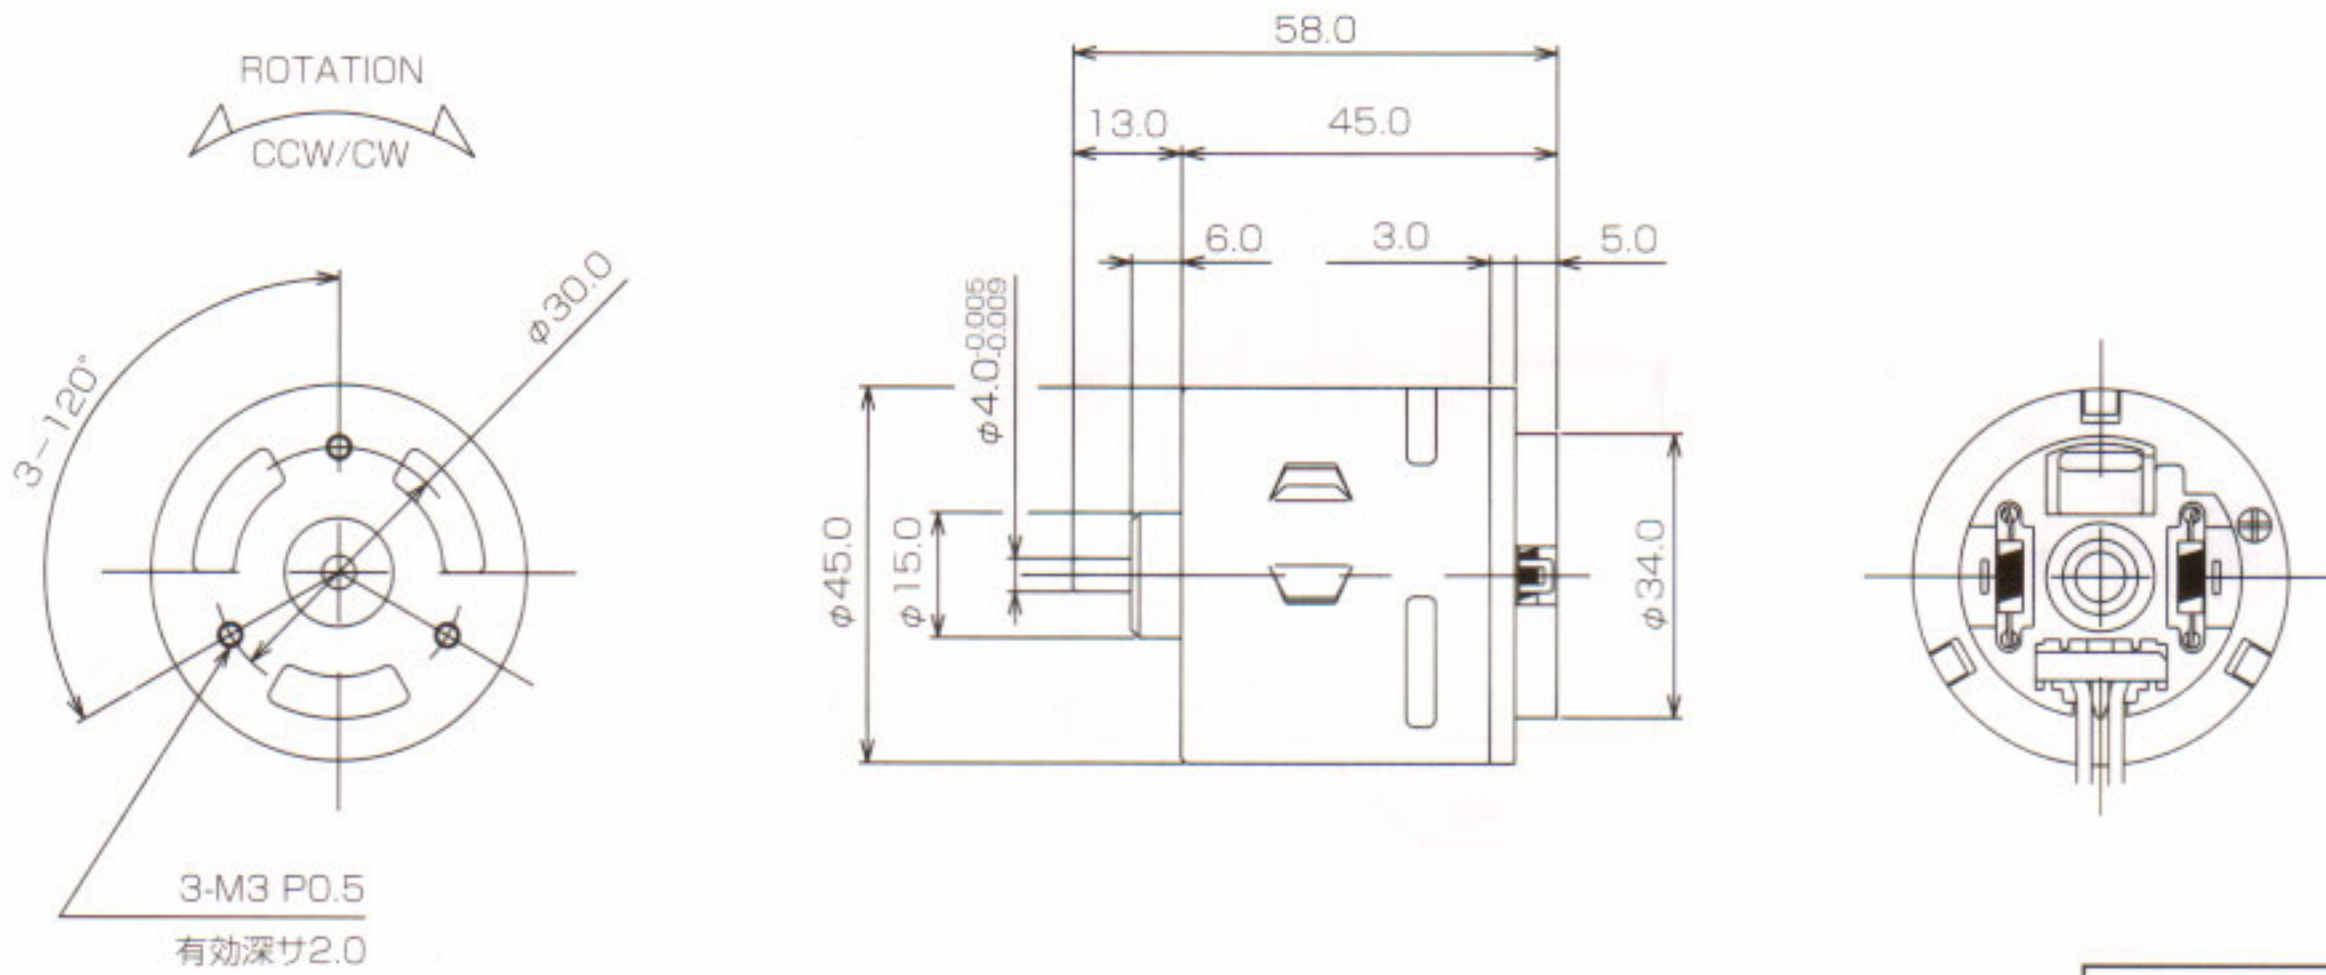

WEIGHT : 195g

FMR4545 HL1

24V

FMR4545 LD

100VAC

