



# FMR4570 FM-84

主な用途 / マッサージャー  
 ガーデンスプレー  
 アクチュエーター

Main Application / Massager  
 Garden spray  
 Actuator

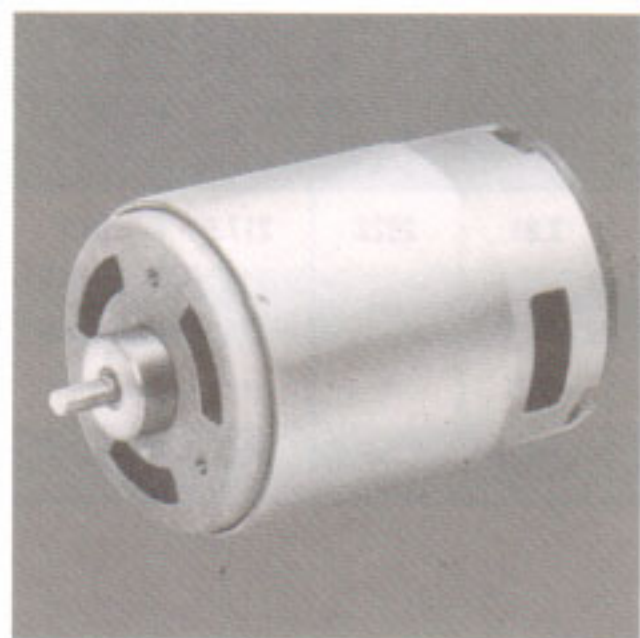

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
	OPERATING RANG	RATED	SPEED	CURRENT	TORQUE		SPEED	CURRENT	TORQUE		
			r/min	A	g-cm	mN-m	r/min	A	g-cm	mN-m	A
FMR 4570 LE1	10~30	24	4400	0.15	360	35.3	3750	0.83	2444	239.5	4.77
FMR 4570 12PJ	10~30	24	4500	0.17	440	43.1	3900	1.08	3215	315.1	6.86
FMR 4570 12PC	10~30	24	11000	0.45	460	45.1	9500	2.76	3300	323.4	17.0
FMR 4570 7PHAS	80~120	100	3900	0.03	365	35.8	3300	0.18	2380	233.0	1.01
FMR 4570 12PT	80~120	100AC	7400	0.09	(500)	(49.0)	(5500)	(0.5)	—	—	—
FMR 4570 12PU	100~240	200AC	7800	0.06	(500)	(49.0)	(5700)	(0.27)	—	—	—

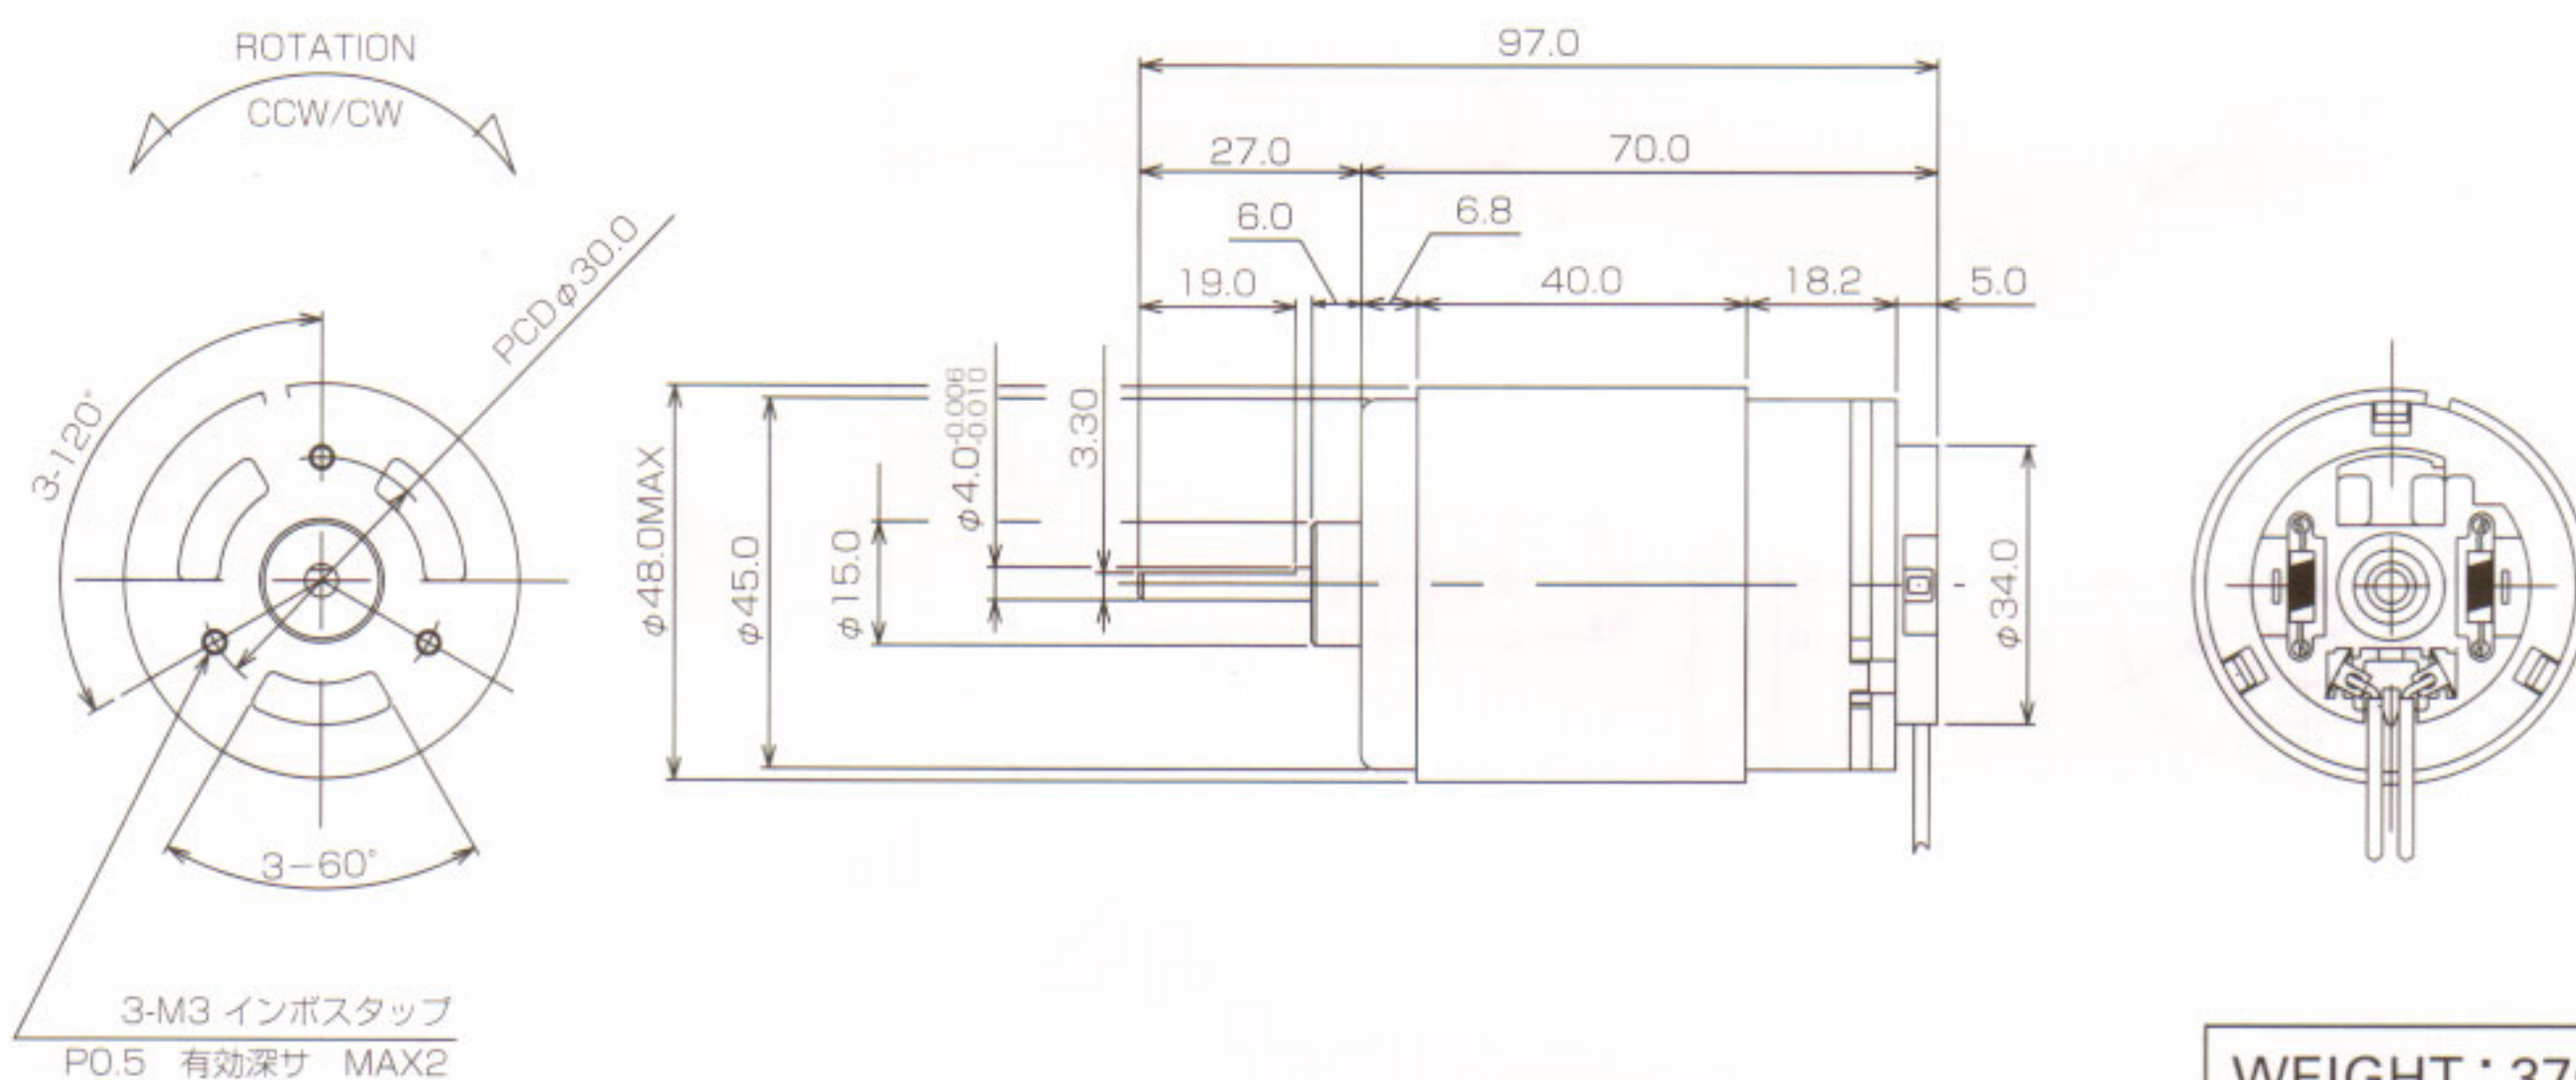

## FMR4570 12PC

24V

## FMR4570 7PHAS

100V

